


Removing the Drawers (If Required)


Removal

1. Fully extend the drawer.
2. Locate the grey tabs underneath the drawer. Pull out tabs until you hear a click.
3. Lift the drawer up and out.

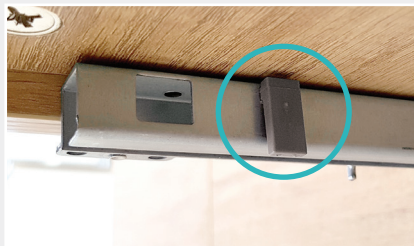

Re-Fitting

1. Ensure both drawer runners are fully extended.
2. Slide the drawer onto the top of the runner ensuring that the holes drop down onto the screws as shown.
3. Push grey tabs back in until you hear them click into place.

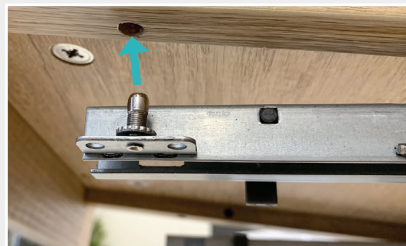

TO THE INSTALLER

SOLID PVC CABINET

A Holesaw Can Be Used On The Side Of The Cabinet For Washing Machine Hose Entry Points

Remember to remove the drawer before proceeding to drill

Sealing & Waterproofing

The vanity unit cabinet is water resistant, but NOT water proof, so it is essential to seal (with an appropriate bathroom silicon) around the base of the cabinet where it meets the floor.

Any swelling that may occur after installation, from water damage, bath water or mopping floors will not be covered under warranty.

This product is to be installed by a Licensed Tradesperson

